
6 Tankless Units Installation- Common Venting

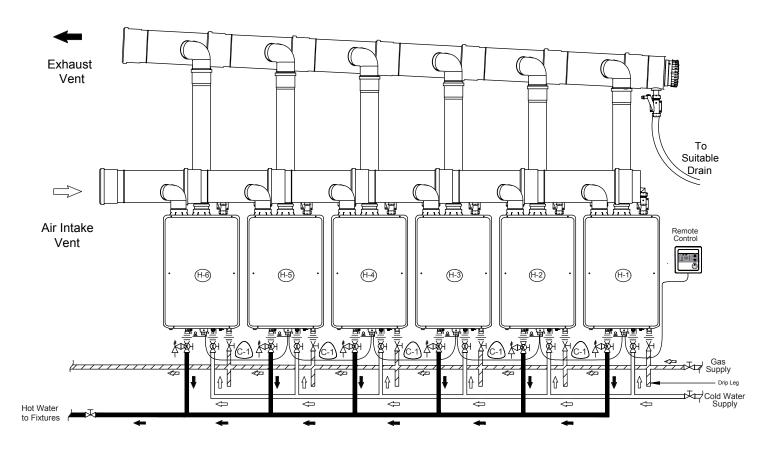

System Components Written System Description Six Unit Tankless Installation: H-1-6: (6) Tankless RTGH-CM95DVLN Water Heaters Six tankless water heaters shall be installed, connected with C-1: (5) EZ-Link Cable EZ-Link cables, a single remote control, and vented to the outside per (6) Tankless Service Valve Kits (Webstone EXP2 or equivalent) the Rheem Common Venting Installation instructions. The tankless (6) Pressure Relief Valve for tankless (1) Common Vent 6 Units DV Inline units shall be plumbed in parallel with a minimum gas and water header of 1" pipe or as code requires. Cold water shall feed the tankless units. The tankless units shall supply a single temperature NOTE: Common Vent is only approved for Natural Gas Applications. setting of water for application use. Plumbing, pipe size, valves, Legend Drawing No: 6-Tankless-Units-Installation-Common-Venting all to be determined by the engineer or installing contractor. Pressure Relief Shut-off Valve This drawing is intended as a guide only. It is not to be used as an alternative to Cold Water Isolator Valve Assembly a professionally engineered project drawing. This drawing does not imply compliance with local building codes. Installation may vary, depending on Hot Water Pipe installation location, and must be done in accordance with all local building Check Valve codes. Consult with local building officials prior to installation